


JBI HYDRAULIC RANGE GRADER BLADES

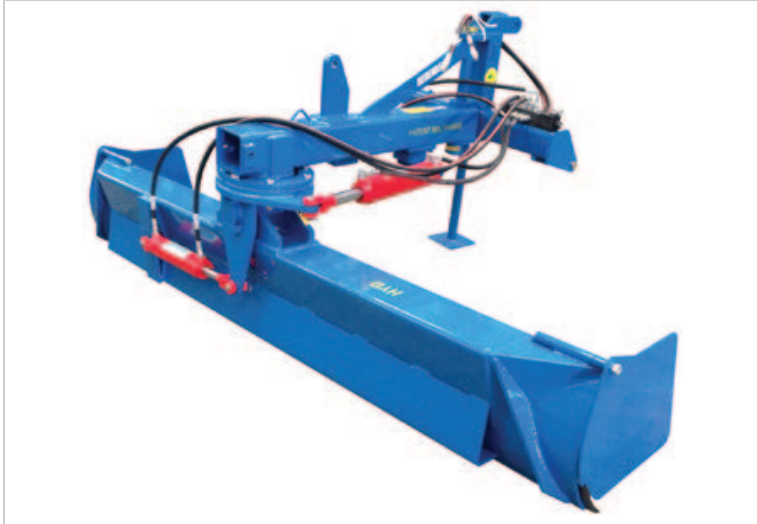

The Hydraulic grader blade comes as standard in 8' with options of 7' and 10'. The two ram and three ram models are exactly the same but for the exchanging of one ram for a manual link. The hardened cutting edge is fully reversible and the blade can be run forwards or backwards with full hydraulic control. The hydraulic grader can be angled up to 45 degrees both ways and can be offset up to 600mm left or right. The tilt option is in excess of 30 degrees left or right. All models are available with an optional 14" Holden wheelkit for depth control which can be operated manually or hydraulically.

PRODUCT DETAILS

Make	John Berends Implements
Model	0013, 0014, 0017, 0028
Weight	555kg
Tractor HP	75-200hp
Cutting Edge Width	10', 7', 8'
Tractor CAT Connection	cat 2
SKU	JBI-28

DISCLAIMER

The material and information contained on this website is for general information purposes only. You should not rely upon the material or information on the website as a basis for making business, legal, or any other decisions. Whilst we endeavour to keep the information up to date and correct, Agpower makes no representations or warranties of any kind, express or implied about the completeness, accuracy, reliability, suitability, or availability with respect to the website or the information, products, services, or related graphics contained on the website for any purpose. Any reliance you place on such material is therefore strictly at your own risk.

CONTACT DETAILS

New & Used Machinery: Brad Storey | Mobile: 0409 138 830 | Email: administration@agpower.com.au

Spare Parts & Accessories: Trevor Phelan | Mobile: 0458 036 370 | Email: administration@agpower.com.au

Agpower & Transport Pty Ltd

 465 Maroondah Highway,
Lilydale Vic 3140

 Phone: (03) 9739 5006
 Fax: (03) 9739 5187

 /agpowerLilydale
 /agpower_and_transport_lilydale



(03) 9739 5006  465 MAROONDAH HWY, LILYDALE VIC 3140

PRODUCT DESCRIPTION

- 10mm Mouldboard —500mm high clearance with extra support on the rear of the blade
- Reversible hardened cutting edge
- Hydraulic angle up to 45° both ways
- Hydraulic offset up to 600mm both ways (manual option available)
- Hydraulic tilt in excess of 30° left or right
- Blade can be reversed for back filling
- Electric or manual diverter kits available
- Minimum 75HP requirement
- Optional 14" Holden depth wheel with either manual ratchet or hydraulic adjustment
- "8' model - 520kg & 10' model - 550kg

DISCLAIMER

The material and information contained on this website is for general information purposes only. You should not rely upon the material or information on the website as a basis for making business, legal, or any other decisions. Whilst we endeavour to keep the information up to date and correct, Agpower makes no representations or warranties of any kind, express or implied about the completeness, accuracy, reliability, suitability, or availability with respect to the website or the information, products, services, or related graphics contained on the website for any purpose. Any reliance you place on such material is therefore strictly at your own risk.

CONTACT DETAILS

New & Used Machinery: Brad Storey | Mobile: 0409 138 830 | Email: administration@agpower.com.au

Spare Parts & Accessories: Trevor Phelan | Mobile: 0458 036 370 | Email: administration@agpower.com.au

Agpower & Transport Pty Ltd

 465 Maroondah Highway,
Lilydale Vic 3140

 Phone: (03) 9739 5006
 Fax: (03) 9739 5187

 /agpowerLilydale
 /agpower_and_transport_lilydale