


SILVAN IDS1401 DIAPHRAGM PUMP

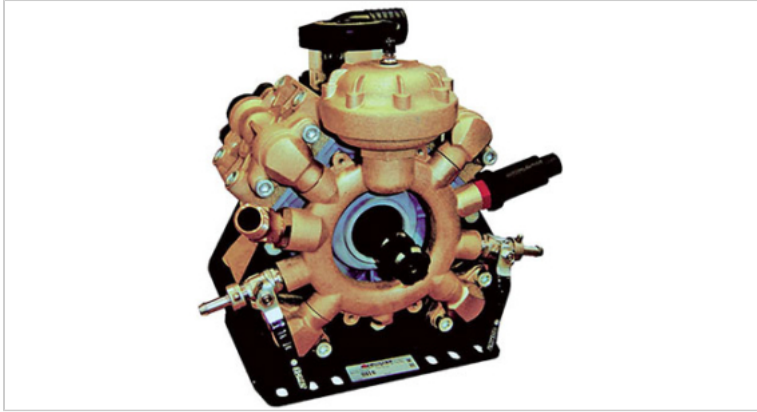

93L/min pump with Male - Male shaft. All Silvan IDS series high pressure diaphragm pumps are built for 540 RPM operation, are self-priming & feature a corrosion resistant cast anodised aluminium body with brass heads and manifold. Tough and reliable they will run dry without risk of damage. All pumps are supplied with appropriate hose connections, mounting base plates and 1 3/8" six splined shaft.

PRODUCT DETAILS

Make	Silvan
Model	CDS1401
Pump	135 L/min
Dimensions	396 x 404 x 298mm
Weight	45kg
Max. Pressure	5000(kPA)
Shaft	Male - Male
Diaphragms	3
SKU	SILVAN-CDS1401

DISCLAIMER

The material and information contained on this website is for general information purposes only. You should not rely upon the material or information on the website as a basis for making business, legal, or any other decisions. Whilst we endeavour to keep the information up to date and correct, Agpower makes no representations or warranties of any kind, express or implied about the completeness, accuracy, reliability, suitability, or availability with respect to the website or the information, products, services, or related graphics contained on the website for any purpose. Any reliance you place on such material is therefore strictly at your own risk.

CONTACT DETAILS

New & Used Machinery: Brad Storey | Mobile: 0409 138 830 | Email: administration@agpower.com.au

Spare Parts & Accessories: Trevor Phelan | Mobile: 0458 036 370 | Email: administration@agpower.com.au

Agpower & Transport Pty Ltd

📍 465 Maroondah Highway,
Lilydale Vic 3140

📞 Phone: (03) 9739 5006
📠 Fax: (03) 9739 5187

📘 /agpowerLilydale
📷 /agpower_and_transport_lilydale



(03) 9739 5006  465 MAROONDAH HWY, LILYDALE VIC 3140

PRODUCT DESCRIPTION

All Silvan IDS series high pressure diaphragm pumps are built for 540 RPM operation, are self-priming & feature a corrosion resistant cast anodised aluminium body with brass heads and manifold. Tough and reliable they will run dry without risk of damage. All pumps are supplied with appropriate hose connections, mounting base plates and 1 3/8" six splined shaft.

DISCLAIMER


The material and information contained on this website is for general information purposes only. You should not rely upon the material or information on the website as a basis for making business, legal, or any other decisions. Whilst we endeavour to keep the information up to date and correct, Agpower makes no representations or warranties of any kind, express or implied about the completeness, accuracy, reliability, suitability, or availability with respect to the website or the information, products, services, or related graphics contained on the website for any purpose. Any reliance you place on such material is therefore strictly at your own risk.



CONTACT DETAILS



New & Used Machinery: Brad Storey | Mobile: 0409 138 830 | Email: administration@agpower.com.au

Spare Parts & Accessories: Trevor Phelan | Mobile: 0458 036 370 | Email: administration@agpower.com.au

Agpower & Transport Pty Ltd

 465 Maroondah Highway,
Lilydale Vic 3140

 Phone: (03) 9739 5006
 Fax: (03) 9739 5187

 /agpowerLilydale
 /agpower_and_transport_lilydale