




SRM-236TES

**LIGHTWEIGHT BRUSHCUTTER
WITH 20% MORE CUTTING TORQUE**

1.62 gear reduction ratio generates greater torque against engine displacement.

	SRM-236ES	SRM-236TES
Engine Displacement	21.2cm ³	21.2cm³
Output	0.71kW / 0.97ps	0.71kW / 0.97ps
Gear Reduction Ratio	1.36	1.62
Emission Regulation	ST2	ST2

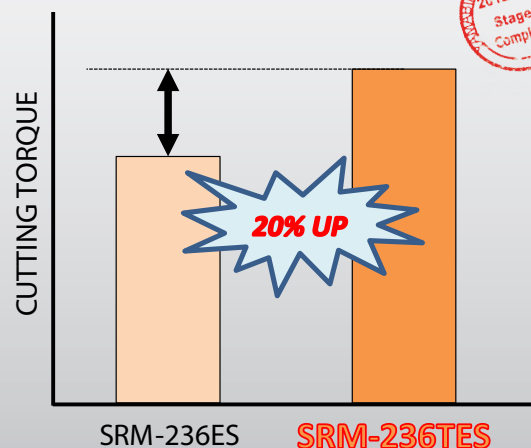

FEATURES AND BENEFITS

TRIMMER & BRUSHCUTTER



■ Tool-less air filter cover



■ Commercial-grade felt air filtration



■ Anti vibration system



■ Effortless starting system



■ Tap & Go nylon line cutting head (F4)

- 21.2cm³ professional-grade 2-stroke engine with good acceleration even in cold conditions
- Light weight high torque gear case for more power and faster cutting through dense brush
- Commercial-grade felt air filtration for long engine life
- Tool-less air filter cover for easy access

- Effortless starting system for easy starting
- Ergonomic throttle handle with rubber grip for operator comfort
- Ergonomic U-handle for firm grip and comfortable operation
- Anti vibration system for operator comfort
- Tap & Go nylon line cutting head for quick line feeding



SRM-236TES SPECIFICATIONS

Model	Engine Displacement (cm ³)	Output (kW/ps)	Dry Weight* (kg)	Fuel Tank Capacity (L)	Drive Shaft Type	Drive Shaft Diameter (mm)	Main Shaft Diameter (mm)
SRM-236TES	21.2	0.71 / 0.97	L : 5.1 U : 5.6	0.44	Solid	6.0	25.0

**Unit without cutting attachment and shield